



SELECT SPACING FROM CURTAIN TO WALL:


- () - 6" MIN REQ'D FOR OPERATION
- () - 24" MIN REQ'D FOR PASSAGE
- () - OTHER: _____





DETAIL A
(4X SCALE)



DETAIL A-2
(4X SCALE)

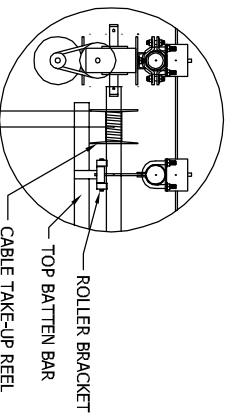


DETAIL B
(4X SCALE)

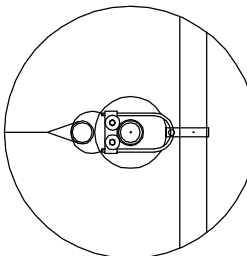

DETAIL C
(6X SCALE)

JOIST SPACING: (#)
(VERIFY IN FIELD)

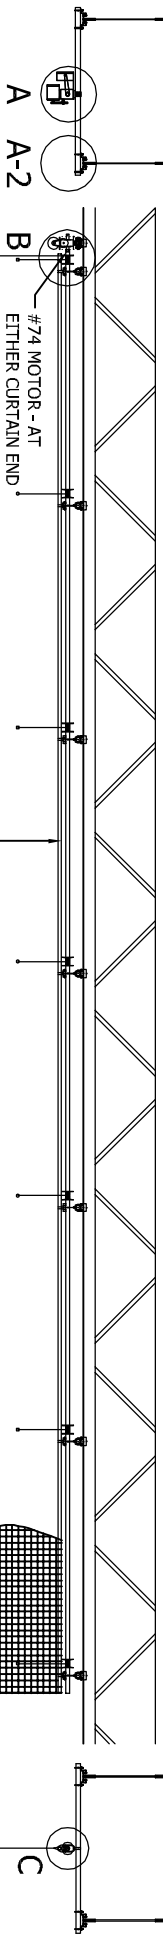

INDICATE MESH COLOR:
() GREY
(STD. FOR TRANSPARENCY)
() WHITE
(AVAIL. UPON REQUEST)

VINYL COLOR: _____

BURGUNDY	WHITE
BLACK	RED
ORANGE	PURPLE
YELLOW	GREY
BRIGHT GREEN	TAN
NAVY BLUE	GREEN
BLUE	

MESH/COTE VINYL-COATED POLYESTER MESH (50% OPEN)

Fed. Method	Test	Result
5970	Adhesion	25 lbs.
5041	Weight, oz./sq. yd.	9 oz.
5134	Tear Strength	95 lbs.
5100	Tensile	200 lbs/in.
5903	Flame Maximum	5 sec.

SOLID VINYL, POLYESTER REINFORCED - Mildew & Bacteria resistant

Fed. Method	Test	Result
5970	Adhesion	30 lbs.
5041	Weight, oz./sq. yd.	19 oz.
5134	Tear Strength	95 lbs.
5100	Tensile	260 lbs/in.
5903	Flame Maximum	5 sec.

MODEL # VSCM FOLD-UP DIVIDER CURTAIN - BETWEEN BEAMS
(#) REQ'D - (#) WIDTH, (#) HGT - LOC: MAIN GYM

CURTAIN WIDTH: (#) _____

10' VINYL (WITH ALLOWANCE FOR BOTTOM BATTEN)
2" FLOOR CLEARANCE
1.9" Ø BOTTOM BATTEN TUBE

TYPICAL LOADING WEIGHT: **10 LBS / LIN. FT.**

SCALE: 1" = 1'

M/

		PROJECT	
MANUFACTURING COMPANY ST. LOUIS, MO 63125 1-314-514-4000 1-800-572-7259 FAX: 1-314-514-2886 www.aalcoinc.com		CITY/STATE	
ARCHITECT CONTRACTOR JOB NO.		DATE	
REVISIONS BY:		SCALE	
DATE		ISSUED BY	
SHEET		SPEC SECTION 11480	