



SELECT SPACING FROM CURTAIN TO WALL:


- () - 6" MIN REQ'D FOR OPERATION
- () - 24" MIN REQ'D FOR PASSAGE
- () - OTHER: _____




**DETAIL A
(4X SCALE)**

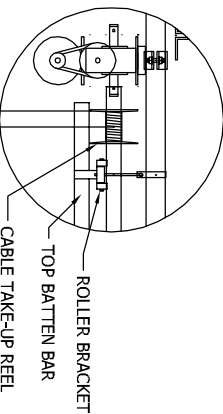

**DETAIL B
(4X SCALE)**



**24" TO-BEAM
HEIGHT
RETRACTED**

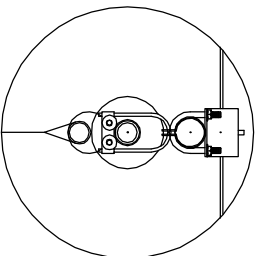


**DETAIL C
(6X SCALE)**

INDICATE MESH COLOR:

- () GREY (STD. FOR TRANSPARENCY)
- () WHITE (AVAIL. UPON REQUEST)

- COLOR SELECTIONS**
- WHITE ROYAL BLUE
 - PURPLE RED
 - KELLY GRN ORANGE
 - YELLOW TAN
 - BLACK BURGUNDY
 - FOREST GRN GREY
 - NAVY BLUE

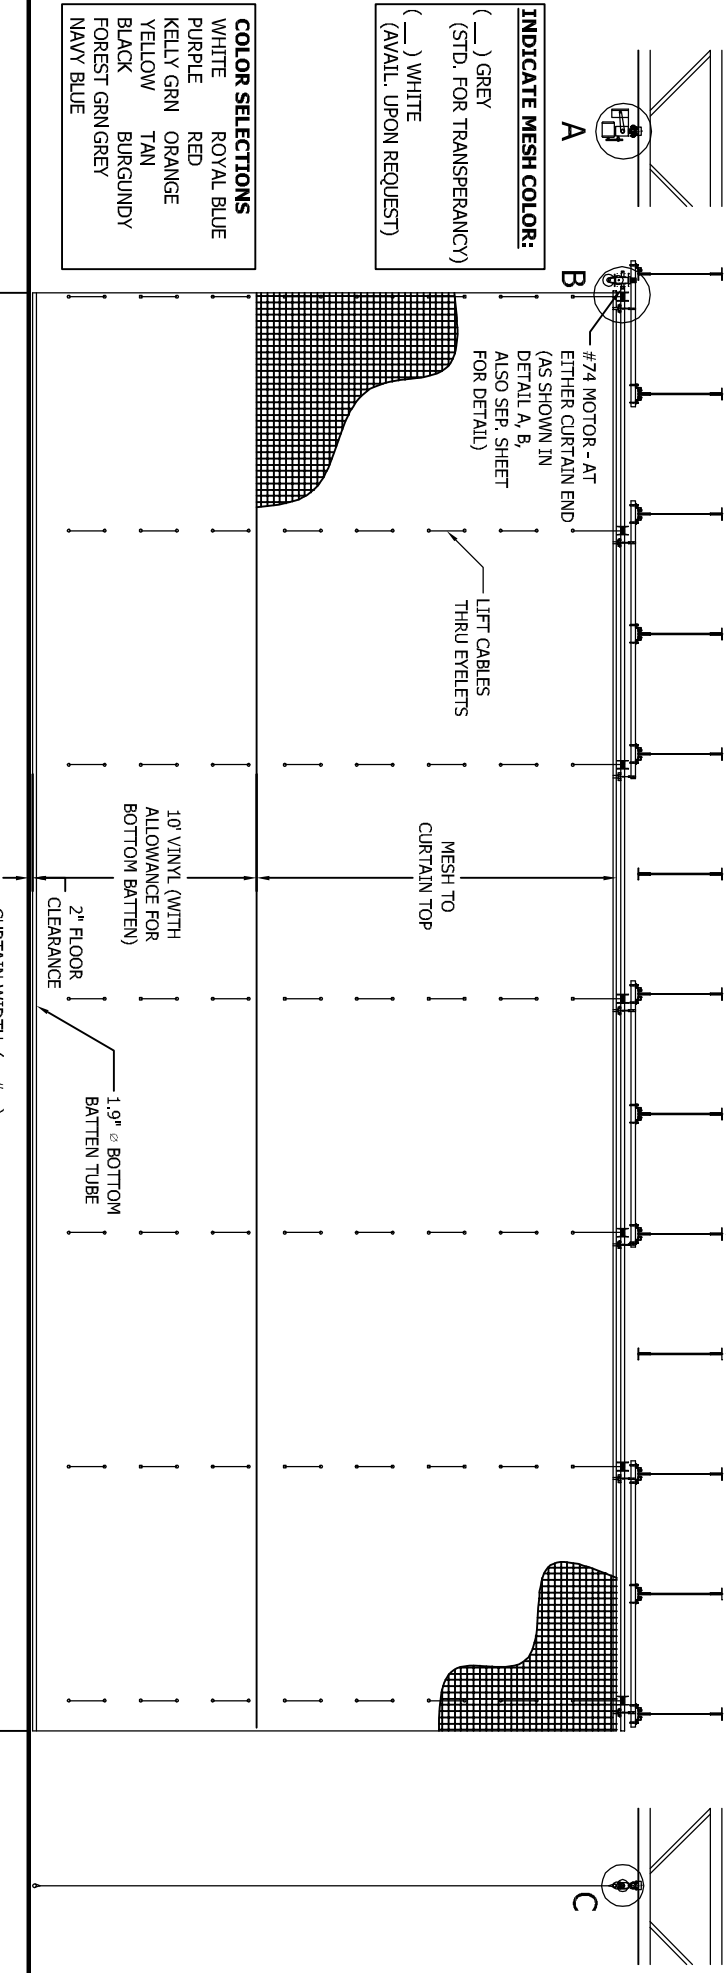

MODEL # VSCM FOLD-UP DIVIDER CURTAIN - PERPENDICULAR BEAMS

(#) REQ'D - (#) WIDTH, (#) HGT - LOC: MAIN GYM

CURTAIN WIDTH: (#)

MESH/COTE VINYL-COATED POLYESTER MESH (50% OPEN)

Fed. Method	Test	Result
5970	Adhesion	25 lbs.
5041	Weight, oz./sq. yd.	9 oz.
5134	Tear Strength	95 lbs.
5100	Tensile	200 lbs/in.
5903	Flame Maximum	5 sec.

SOLID VINYL, POLYESTER REINFORCED - Mildew & Bacteria resistant

Fed. Method	Test	Result
5970	Adhesion	30 lbs.
5041	Weight, oz./sq. yd.	18 oz./14 oz.
5134	Tear Strength	95 lbs.
5100	Tensile	260 lbs/in.
5903	Flame Maximum	5 sec.

TYPICAL LOADING WEIGHT: 10 LBS / LIN. FT.

SCALE: 1" = 1'

M/

		PROJECT CITY/STATE ARCHITECT DEALER CONTRACTOR JOB NO. DATE	
MANUFACTURING COMPANY ST. LOUIS, MO 63125 1-314-514-4300 1-800-572-7239 FAX: 1-314-514-2886 WWW.AALCOINC.COM		REVISIONS BY SCALE NTS DRAWN BY SHEET SPEC SECTION 11480	