



SELECT SPACING FROM CURTAIN TO WALL:



- () - 6" MIN REQ'D FOR OPERATION
- () - 24" MIN REQ'D FOR PASSAGE
- () - OTHER: _____



DETAIL A
(4X SCALE)

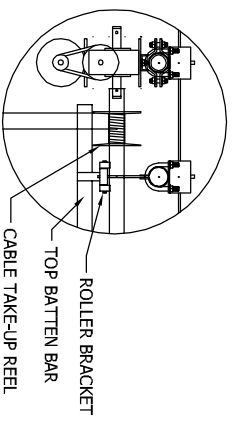

DETAIL B
(4X SCALE)

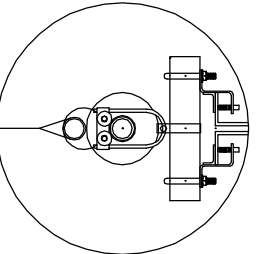


DETAIL C
(6X SCALE)

INDICATE MESH COLOR:

- () GREY (STD. FOR TRANSPERANCY)
- () WHITE (AVAIL. UPON REQUEST)

COLOR SELECTIONS

WHITE	ROYAL BLUE
PURPLE	RED
KELLY GRN	ORANGE
YELLOW	TAN
BLACK	BURGUNDY
FOREST GRN	GREY
NAVY BLUE	

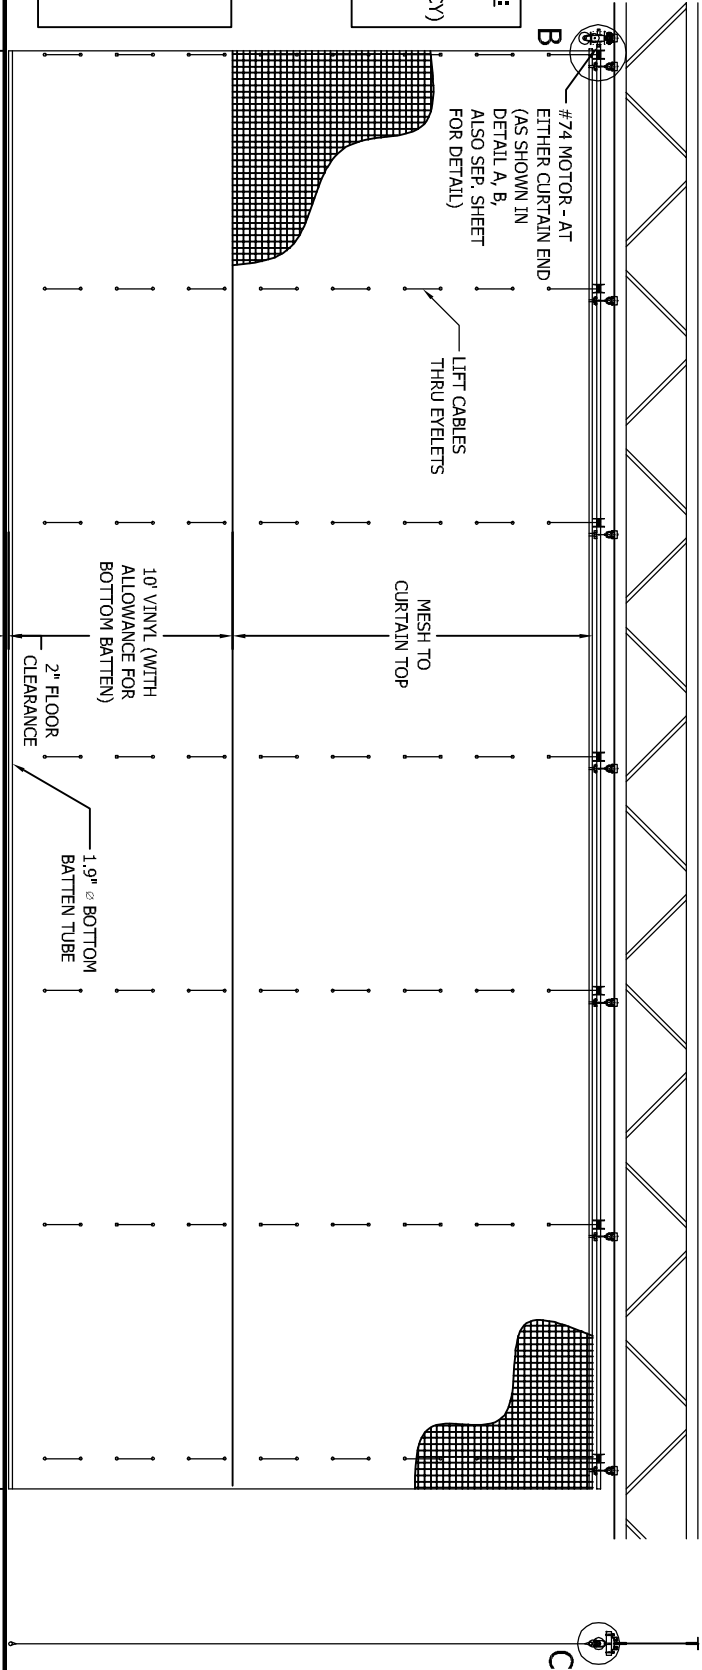

MESH/COTE VINYL-COATED POLYESTER MESH (50% OPEN)

Fed. Method	Test	Result
5970	Adhesion	25 lbs.
5041	Weight, oz./sq. yd.	9 oz.
5134	Tear Strength	95 lbs.
5100	Tensile	200 lbs/in.
5903	Flame Maximum	5 sec.

SOLID VINYL, POLYESTER REINFORCED - Mildew & Bacteria resistant

Fed. Method	Test	Result
5970	Adhesion	30 lbs.
5041	Weight, oz./sq. yd.	18 oz./14 oz.
5134	Tear Strength	95 lbs.
5100	Tensile	260 lbs/in.
5903	Flame Maximum	5 sec.

MODEL # VSCM FOLD-UP DIVIDER CURTAIN - UNDER BEAM

(#) REQ'D - (#) WIDTH, (#) HGT - LOC: MAIN GYM

CURTAIN WIDTH: (#) _____

TYPICAL LOADING WEIGHT: 10 LBS / LIN. FT.

SCALE: 1" = 1'

		PROJECT CITY/STATE ARCHITECT DEALER CONTRACTOR JOB NO. DATE	
MANUFACTURING COMPANY ST. LOUIS, MO 63125 1-314-514-4300 1-800-537-7239 FAX: 1-314-514-2886 WWW.AALCOINC.COM		REVISIONS BY SCALE NTS DRAWN BY SHEET	
SPEC SECTION 11480		DATE	